





# NORTH CENTRAL EMERGENCY VEHICLES LESTER PRAIRIE, MN

S.O. 147480 / Q126551  
AFT1005 RESCUE PUMPER  
4 DOOR 4X2 CHASSIS

THIS GRAPHICS DRAWING IS FOR REFERENCE PURPOSES. GRAPHICS ARE SUBJECT TO MINOR VARIATIONS BASED ON LAYOUT OF THE TRUCK AND AMOUNT OF AVAILABLE SPACE. THE SHOP ORDER WILL SUPERCEDE THIS DRAWING FOR PAINTED OPTIONS.

DEALER APPROVAL _____	DATE _____	<input type="checkbox"/> AS IS
CUSTOMER APPROVAL _____	DATE _____	<input type="checkbox"/> WITH REVISIONS

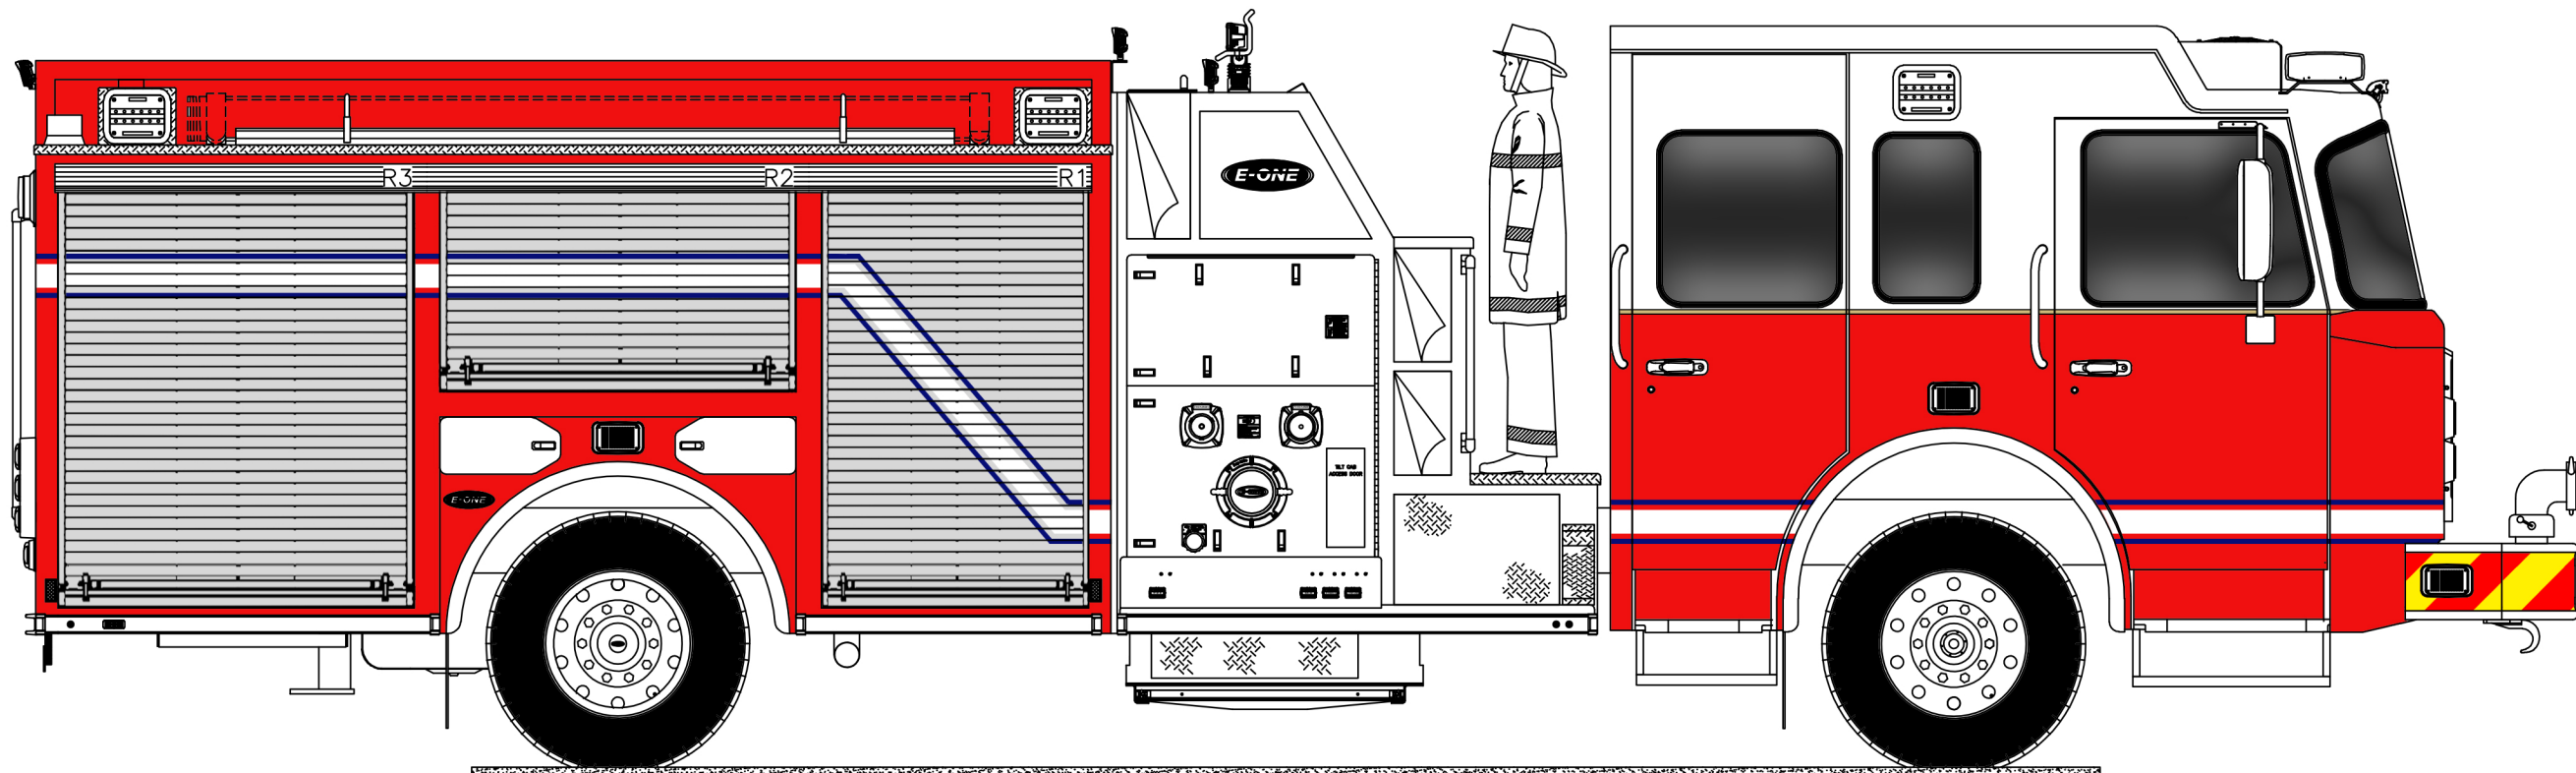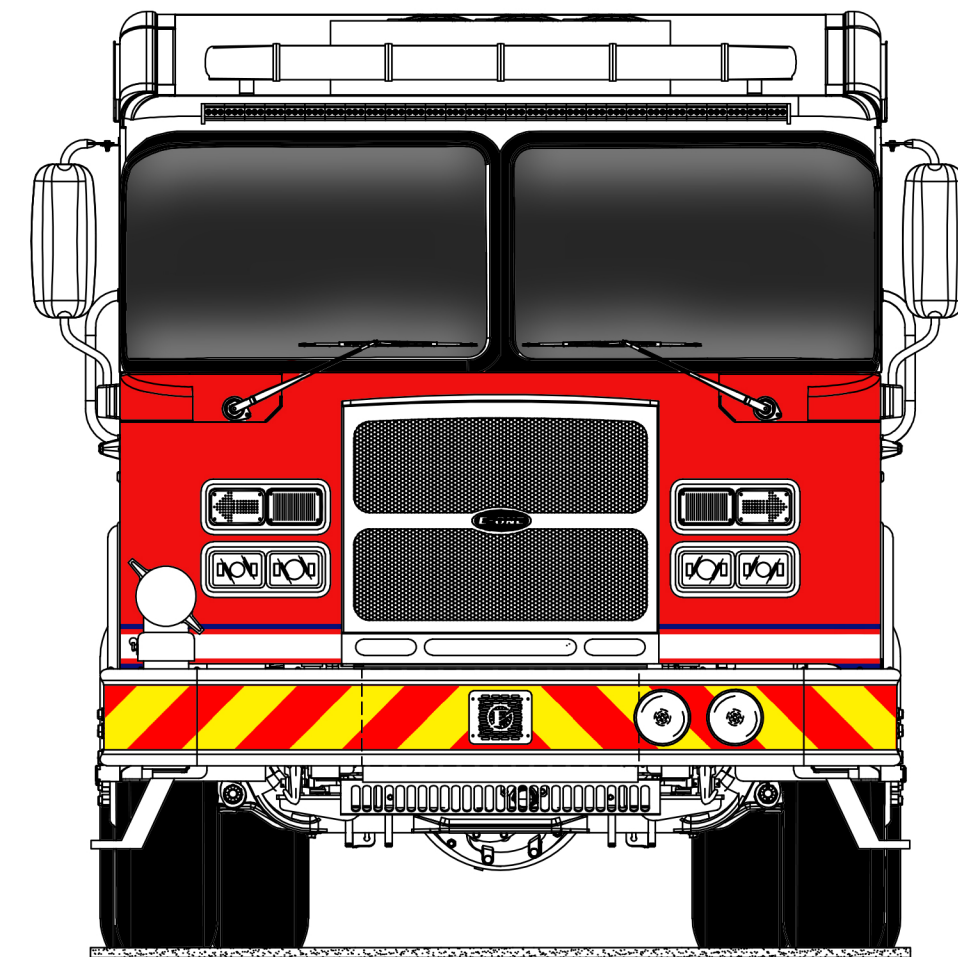



## Fire Apparatus Quotation for: NORTH CENTRAL EMERGENCY VEHICLES



Quotation Number: 126551 Rev: 15

Unit Description: XRAL-SPAR

Quote Description: AFT Rescue Pumper, Aluminum, Spartan

Salesperson: GSTOFER

Salescode	Extended Description	Qty	
<b>TESTING COMPLIANCE STANDARD</b>			
1001-0065	The E-ONE supplied components of the vehicle shall meet the requirements of NFPA 1901, 2016 edition.	1	
3090-0002	OAH. Unit has no overall height restrictions.	1	
3090-0004	OAL. Unit has no overall length restrictions.	1	
3090-0007	Hosebed hoseload allowance on the apparatus shall be 1200 lbs.	1	
3340-1137-12C	Equipment allowance on the apparatus shall be 2500 lbs. This allowance is in addition to the weight of the hoses and ground ladders listed in the shop order as applicable.	1	
<b>INSPECTIONS AND PENALTIES</b>			
1002-0001	Final inspection trip.	1	
<b>CHASSIS PREP</b>			
1020-0047	Engine cooler. For use with commercial chassis - supplied by chassis OEM. Requires engine cooler valve on pump panel.	1	
1020-0061	Chassis shipping and handling charges for delivery to Ocala, Florida	1	
1020-0073	Chassis prep Spartan	1	
<b>BUMPER TRAYS</b>			
1150-0571	Slats shall be provided for bumper tray(s).	1	
<b>FRAME ASSEMBLY</b>			
1250-0011	Rear underbody support frame.	1	
<b>ENGINES &amp; TRANSMISSIONS</b>			
1200-0126	Commercial chassis speed to be electronic limited and not to exceed a maximum of 68 MPH. Note: Speed rating may be lower based on OEM tire ratings/top speed limitations provided on chassis.	1	

Salescode	Extended Description	Qty	
<b>ENGINES &amp; TRANSMISSIONS</b>			
1200-0439	Cummins X12 engine (2021), 500EV HP rating @ 1900 RPM, 1700 lb-ft Torque @ 1000 RPM, 2000 RPM Governed Speed	1	
<b>CHASSIS OPTIONS</b>			
1680-0011	Tow eyes rear below body, painted.	1	
<b>CAB MODEL</b>			
1520-0275	94" Wide, MFD (54 CA) 4 door cab with 10" raised roof.	1	
1520-0277	Tilt control for Cab. Includes switch and cylinder lock cable accessible on the officer side pump panel through a vertically hinged door. On Rescues locate in forward officer side body compartment.	1	
<b>CAB BADGE PACKAGE</b>			
1610-0000	Cab and body to have applicable E-ONE logos.	1	
<b>CAB DOOR OPTIONS</b>			
1550-0371	Alternating reflective striping (chevron) to match rear striping, positioned on the cab door interior angling down and away from truck. Striping provided on an aluminum plate or blank plate provided with dealer installed striping.	1	
<b>MISC EXTERIOR CAB OPTIONS</b>			
1675-0007	Diesel fuel only label.	1	
<b>BODY COMPT LEFT SIDE</b>			
3100-0153	Driver side body with full height 42" wide forward and 56" wide rearward enhanced extended compartmentation. Includes (1) 56" wide compartment over the wheel well.	1	
<b>BODY COMPT RIGHT SIDE</b>			
3120-0283	Officer side body with full height 42" wide forward and 56" wide rearward enhanced extended compartmentation. Includes (1) 56" wide compartment over the wheel well and one (1) storage tunnel.	1	
<b>BODY COMPT REAR</b>			
3110-0013	Full Height Rear Compartment with Officer Side Storage Tunnel. Includes smooth plate panels and storage access door with push button latch.	1	
3110-0052	Bolt-on diamond plate tailboard (full width of rear compartment). Includes the enhanced extended side compartment frame work and handrails provided as applicable to meet NFPA 3-point contact requirements.	1	
3110-0092	Enhanced Extended Compartmentation stepped down below hosebed level.	1	

Salescode	Extended Description	Qty	
<b>BODY COMPT REAR</b>			
	Includes embossed diamond plate compartment tops.		
<b>DOORS</b>			
3300-0017-004	Door roll up short (up to 45") with satin finish ROM. Location(s): L2.	1	
3300-0017-016	Door roll up short (up to 45") with satin finish ROM. Location(s): R2.	1	
3300-0019-003	Door roll up tall (greater than 45") with satin finish ROM. Location(s): L1.	1	
3300-0019-005	Door roll up tall (greater than 45") with satin finish ROM. Location(s): L3.	1	
3300-0019-015	Door roll up tall (greater than 45") with satin finish ROM. Location(s): R1.	1	
3300-0019-017	Door roll up tall (greater than 45") with satin finish ROM. Location(s): R3.	1	
3300-0019-027	Door roll up tall (greater than 45") with satin finish ROM. Location(s): B1.	1	
3300-0368	Pull-down bungee type straps for full height and high side roll-up door(s) on body / pump module. For use with ROM and AMDOR doors only.	1	
<b>SHELVES</b>			
3370-0247	Tracks for adjustable shelf and/or adjustable tray in a compartment. Location:	4	N/A
<b>TRAYS / TOOLBOARDS</b>			
3380-0019-135	Running board suction tray. Includes removable slats in bottom of tray. Location(s): driver side running board	1	
3380-0019-136	Running board suction tray. Includes removable slats in bottom of tray. Location(s): officer side running board	1	
<b>COVERS</b>			
3305-0005	Crosslay cover to be hinged rearward.	1	
3305-0015-000-02	Vinyl Red speedlay front cover.	1	
3305-0064-135	Nylon black strap with stainless steel quick-release buckle for hose tray. Strap to attach to side walls of tray down low as applicable. Location: driver side running board.	1	
3305-0064-136	Nylon black strap with stainless steel quick-release buckle for hose tray. Strap to attach to side walls of tray down low as applicable. Location: officer side running board.	1	
3305-0119	Hold open device(s) for aluminum crosslay (single or bi-fold) cover. Locate as required based off options on module.	1	
3305-0742-000-02	Vinyl Red hose bed cover top and rear of hosebed area. Includes footman loop upper and lower rear to secure the cover.	1	
3305-0744-000-02	Vinyl Red speedlay side covers. One pair per speedlay module. Includes footman loops and buckels at the lower portion.	1	

Salescode	Extended Description	Qty	
<b>COVERS</b>			
3305-0805	Single diamond plate cover for the crosslay area. Includes applicable grab handle(s).	1	
<b>PUMP MODULE</b>			
3130-0167	Pump module to be 76" wide (side to side). Includes upper, lower, crosswalk, speedlay and tranverse module(s) if applicable.	1	
3130-0525	Top mount pump module with walkway and integral double speedlays (9" W). Extruded aluminum with runningboards. Includes formed walkway access steps.	1	
3130-0532	Pump panel opening is 39" wide. Pumper / tanker only.	1	
3130-0552	Pump module height is 85". Pumper / tanker only.	1	
<b>PUMP PANELS</b>			
3134-0015	Stainless steel TM control panel, driver and officer side pump panels.	1	
3134-0145	Driver and officer side pump panel to be vertical hinged on forward extrusion. Panels to be (3) pieces with upper (2) panels secured in the closed position with push button latches. Upper panel to be held open with gas shock.	1	
<b>MISC PUMP PANEL OPTIONS</b>			
4460-0003	Pump panel tags color coded per NFPA compliance.	1	
<b>PUMP MODULE OPTIONS</b>			
3136-0000-216	Air horn switch at pump panel. Switch to be labeled "Evacuation Alert". Location: on pump operator's panel.	1	
3136-0006	Two (2) pump compartment heaters are to be mounted in the pump area. Locate as low as possible.	1	
3136-0011	P-Rubber in flex joint(s) between pump module and/or body modules.	1	
3136-0058	E-ONE logo mounted one each side on pump module/preconnect panels or at upper body section as shown on approval drawing. Logos to be sized as applicable to available space on panels.	1	
3136-0064	Heat pan. The lower area of the pump compartment to have a four (4) sided heat pan with two (2) removable (side to side) bottoms. Bottoms to be secured in the closed position with butterfly latches.	1	
3136-0437	Crosslay single 10" wide double stack to hold up to 300' of 2.5" DJ hose.	1	
<b>WATER TANK</b>			
4010-0037	1030 Gallon "R" Water Tank. Note: Any foam cell(s) and/or storage options through the tank will reduce the overall water capacity. Tank capacity is 1030 US gallon / 857 Imperial gallons / 3898 Liters.	1	

Salescode	Extended Description	Qty	
<b>WATER TANK</b>			
4010-0099	Fill tower(s) to be located offset to officer side of water tank.	1	
<b>TANK PLUMBING</b>			
4450-0010	2" tank fill Akron manual valve.	1	
4450-0119	3" tank to pump Akron manual valve w/4" tank connection.	1	
<b>FOAM TANK</b>			
4100-0009-590	30 gallon integral foam tank for Class A foam. Foam tank capacity will reduce the water tank capacity. Tank capacity is 30 US gallon / 25 Imperial gallons / 113 Liters.	1	
<b>LADDER STORAGE / RACKS</b>			
3365-0028	Hard Suction Storage Rack. Driver side compartment top. Includes spring hold downs and scuff plates behind spring mounts (as applicable).	1	
3365-0035	Hard Suction Storage Rack. Officer side compartment top. Includes spring hold downs and scuff plates behind spring mounts (as applicable).	1	
3365-0050	Brand of ladders capable of being carried on unit to be Duo-Safety.	1	
3365-0086-B99	Pike pole(s) capable of being stored are to be the following length: (2) 10' pike poles.	1	
3365-0087-Z71	The length of ladders capable of being stored shall be the following: 24' 2-section, 14' roof ladder and 10' attic ladder w/shoes.	1	
3365-0149-O97	Storage tunnel capable of holding (1) 2-section, (1) roof, (1) attic, (2) pike poles, (1) backboard in Officer.	1	
<b>HANDRAILS / STEPS</b>			
3330-0277	Innovative Controls dual lighted LED folding steps rear NFPA. Includes folding steps on driver side rear of the body. (staggered stepped as applicable with tailboard depth) for NFPA hosebed access and handrail mounted on driver side upper hosebed side (as applicable).	1	
3330-0278	Innovative Controls dual lighted LED folding steps rear NFPA. Includes folding steps on officer side rear of the body. (staggered stepped as applicable with tailboard depth) for NFPA hosebed access and handrail mounted on officer side upper hosebed side (as applicable).	1	
<b>MISC BODY OPTIONS</b>			
3340-0004	Hosebed above the booster tank. Includes forward hosebed and tower(s) cover plate work (as applicable). Hosebed adjustable divider extrusion in the forward area and rearward area of the hose bed to run full width of the hosebed (as is practical with other hosebed mounted equipment).	1	

Salescode	Extended Description	Qty	
<b>MISC BODY OPTIONS</b>			
3340-0035	Divider Long. To run full length of hose bed (front to rear).	3	
3340-0075	Body mainframe and hosebed side assemblies for a 90" high body.	1	
3340-0093	Mud flaps, rear, black with E-ONE logo.	1	
3340-0110	The rear of each hose bed divider to have a hand hold cut-out(s).	1	
3340-0145	Rub rail for the body and pump area module(s).	1	
3340-0405	Sign, "STAY BACK 500 FEET" with black reflective lettering. Locate below rear of body.	1	
3340-0520	Smooth plate single axle wheel well painted job color. Includes bolt-on composite wheel well liners and bolt-on polished alum fenderettes.	1	
3340-0681	Body mainframe layout line to be 24". Includes body and all applicable modules.	1	
3340-1648	Anodized aluminum trim on bottom edge of all body compartment openings including pump enclosure if applicable with painted edges.	1	
3340-2216	Recessed fuel fill driver side wheel well - Spartan Chassis.	1	
<b>SCBA BOTTLE STORAGE</b>			
3320-0100	Strap, loop style to retain SCBA bottle(s). Locate one per bottle in each exterior body storage compartment.	1	
3320-0185-497	Fire Shopp brand (1) SCBA bottle storage with hinged door and push button latch. Door shall have a brushed stainless steel finish. Door shall NOT cover the recessed fuel fill if located adjacent to the SCBA storage. Location:driver side rear wheel well offset rearward	1	
3320-0186-495	Fire Shopp brand (2) SCBA bottle storage with hinged door and push button latch. Door shall have a brushed stainless steel finish. Location:driver side rear wheel well offset forward	1	
3320-0186-498	Fire Shopp brand (2) SCBA bottle storage with hinged door and push button latch. Door shall have a brushed stainless steel finish. Location:officer side rear wheel well offset forward	1	
3320-0186-500	Fire Shopp brand (2) SCBA bottle storage with hinged door and push button latch. Door shall have a brushed stainless steel finish. Location:officer side rear wheel well offset rearward	1	
<b>PUMPS</b>			
4005-0031	Rating 1500 GPM.	1	
4005-0196	Hale QMAX 1000-2250 GPM single stage pump. Requires primer option.	1	
<b>PUMP CERTIFICATION</b>			
4475-0000	Pump certification 750-2250 GPM	1	

Salescode	Extended Description	Qty	
<b>PUMP OPTIONS</b>			
4015-0008	Zinc anodes for Hale pump (PR), (1) discharge side and (1) intake side.	1	
4015-0018-340	Valve Inlet MIV-E - Hale. Location: 5 in. front intake.	1	
4015-0022	Mechanical pump seal - Hale.	1	
4015-0053-198	Steamers to be Flush + 1". Location: driver's side.	1	
4015-0053-199	Steamers to be Flush + 1". Location: officer's side.	1	
4015-0098	Manual operated master pump drain. The master drain shall be clearly marked and placed in accessible location on pump panel.	1	
4015-0210	Pump cooler with Innovative Control 1/4 turn valve with "T" handle and label.	1	
4015-0234	Control for engine cooler. Includes Innovative Controls 1/4 turn valve with "T" handle and label. Requires engine cooler option.	1	
4015-0242	Trident primer W/3 barrel push button control. For use with 1250 GPM and larger pumps. Requires 15.6 CFM or larger engine air compressor.	1	
<b>INTAKES</b>			
4440-0004-202	2.5" side suction top mount control handle Akron manual valve. Location: driver side pump panel.	1	
4440-0248	5" front intake without valve to be used with Spartan chassis. The chassis will come equipped with 5" stainless pipe terminating front fascia of the cab (on FC-94) or terminating 2" above the bumper gravel shield with 5" NPT (on other Spartan chassis) and extending to the back of the cab with Victaulic groove for connecting to pump plumbing.	1	
<b>INTAKE OPTIONS</b>			
4445-0005	Front intake swivel 6" polished chrome.	1	
4445-0009	Intake relief valve, Akron.	1	
<b>DISCHARGES AND PRECONNECTS</b>			
4415-0008	1.5" Front bumper discharge Akron manual valve.	1	
4415-0014-581	2.5" Left Pump Panel Discharge Akron Manual Valve. Location: left side discharge 1.	1	
4415-0014-582	2.5" Left Pump Panel Discharge Akron Manual Valve. Location: left side discharge 2.	1	
4415-0016-584	2.5" Right Pump Panel Discharge Akron Manual Valve. Location: right side discharge 2.	1	
4415-0022-350	2.5" Left Rear Discharge Akron Manual Valve. Location: left rear discharge.	1	
4415-0034-583	3" Right Pump Panel Discharge Akron Manual Valve (Waterous pumps noted location to be forward lower port). Location: right side discharge 1.	1	



Salescode	Extended Description	Qty	
<b>DISCHARGES AND PRECONNECTS</b>			
4415-0041	3" Deck Gun Discharge, Akron manual valve. (outlet shall terminate with MNPT threads unless extend gun is install)	1	
4415-0058-853	2.5" Crosslay Akron Manual Valve. Location: crosslay 1.	1	
4415-0065	1.5" Double Speedlay with Akron Manual Valves.	1	
4415-0176-210	Brass Swivel in Tray center front bumper for Front Bumper Discharge.	1	
4417-0106-L65	Deck gun piping to be positioned centered in deck gun channel.	1	
<b>DISCHARGE OPTIONS</b>			
4417-0176	Innovative Controls 3/4" bleeder/drain valve include lift lever with ergonomic grip.	10	
4417-0182	TM Valve controls to be Innovative Controls T-handles with grip activated lock.	13	
4417-0186	Innovative Controls discharge and intake bezels with color code and verbiage for top mount pump panel.	1	
4417-0246	Dealer/Customer installed monitor, nozzle and/or tips, make and model as specified.	1	
<b>PRESSURE GOVERNORS</b>			
4465-0011	Class 1 TPG pressure governor. Includes, water, oil, volt and tachometer.	1	
<b>GAUGES</b>			
4435-0083	Innovative Controls 10 LED SL series water tank level gauge. On pump panel.	1	
4435-0084	Innovative Controls 10 LED SL series foam tank level gauge. On pump panel.	1	
4435-0246	2.5" Innovative Controls stainless steel case pressure gauge (0-400) with color code bezel.	10	
4435-0247	4" Innovative Controls stainless steel case master pressure gauges with bezel. Intake 30-0-400, and discharge 0-400.	1	
<b>FOAM SYSTEMS</b>			
4430-0079	The foam system performance shall be tested and certified in compliance with the applicable NFPA requirements.	1	
4430-0159	Class 1 2.1A foam system with SmartFoam controller.(Class A foam concentrate only)	1	
<b>FOAM SYSTEM OPTIONS</b>			
4432-0053-349	Foam system plumbed to front bumper discharge.	1	
4432-0053-350	Foam system plumbed to left rear discharge.	1	
4432-0053-560	Foam system plumbed to first 2.5 crosslay.	1	

Salescode	Extended Description	Qty	
<b>FOAM SYSTEM OPTIONS</b>			
4432-0053-562	Foam system plumbed to 1.5 first speedlay.	1	
4432-0053-563	Foam system plumbed to 1.5 second speedlay.	1	
<b>ELECTRICAL SYSTEMS</b>			
5010-0125	V-MUX Electrical system for Body functionality only, for use with Spartan chassis/cabs.	1	
5010-0126	Nanoprotech corrosion inhibiting spray coating to be applied only on all body exposed electrical connections (E-ONE content). This is for Spartan chassis cab units.	1	
5010-0129	A midship harness with connectors for a Class 1 Total Pressure Governor and a multiplexed gauge shall be provided on the Spartan chassis (AFT Series only).	1	
<b>WARNING LIGHTS</b>			
5600-0594-3RG-4T	Warning light Federal Signal QuadraFlare QL64 LED PR. Surface mounted with bezel. Location: (1) each side NFPA/ULC required lower zone midship side facing, color will be RED with CLEAR lenses.	1	
5600-0594-3RI-4T	Warning light Federal Signal QuadraFlare QL64 LED PR. Surface mounted with bezel. Location: (1) each side NFPA/ULC required lower zone rear facing, color will be RED with CLEAR lenses.	1	
5600-0773-3RH-4T	Warning light Federal Signal Micro Pulse Ultra model MPS3 LED w/ bezel (PR) RED with CLEAR lenses. Location: (1) each side NFPA/ULC required lower zone rear side facing. Note: MicroPulse Series lights are only available with clear lenses.	1	
5600-0904-C51-4T	Federal Signal PRO LED beacon. Model 300TMP (PR) RED with CLEAR lenses. Location: (1) each side of body on rearward compartment top.	1	
<b>DIRECTIONAL LIGHT BARS</b>			
3340-0125	Smooth plate sanded box for recessed directional light bar on rear body.	1	
5310-0158	Light bar Federal Signal MicroPulse Signal Master LED 32" with 6 lights.The control shall be provided and install by the chassis supplier, Spartan.	1	
<b>DOT LIGHTING</b>			
5150-0017	License plate light LED with chrome housing located at the rear of the body.	1	
5150-0059	Federal Signal QuadraFlare LED vertical mount tail lights. Includes LED stop/tail, arrow turn and back-up lights with vertical Cast 3 housing and weatherproof connectors.	1	
5150-0112	Marker light package .75" Dia TecNiq LED. Commercial pumper and tanker bodies.	1	

Salescode	Extended Description	Qty	
<b>DOT LIGHTING</b>			
5150-0271	Bracket license plate at rear of body. Smooth plate sanded bracket.	1	
<b>LIGHTS - COMPARTMENT, STEP &amp; GROUND</b>			
5380-0281	Light recessed step TecNiq T440 4" LED. Locate one each side of top mount walkway.	1	
5380-0472	Compartment light package TecNiq E45 LED for medium bodies. Includes one light per compartment (two if transverse).	1	
5380-0491	Ground light package TecNiq E10 LED for body only (pump module if equipped). Ground area lights shall be switched from the cab dash area with the work light switch.	1	
<b>LIGHTS - DECK AND SCENE</b>			
5390-0215-395	Deck Lights - Optronics Model TLL44 (PR). Location: rear body/beavertail area on the trailing edge up high.	1	
5390-0216	Hose bed light Optronics LED model TLL44 Locate at front of hose bed. Switched with work light switch in cab.	1	
5390-0217	Crosslay light Optronics LED model TLL44. Locate to rear of crosslay (SM) and forward of crosslay (TM as applicable). Switched with work light switch in cab.	1	
5390-0264-457	FireTech FT-GESM scene lights (PR) with chrome flange (when required) and weatherproof connectors. Switch in cab (driver and officer side lights switched separately). Locate: (1) each side of body rear facing up high.	1	
5390-0344-B25	FireTech FT-GESM scene lights (PR) with chrome flange (when required) and weatherproof connectors with diamond plate mounting box. Switch in cab (driver and officer side lights switched separately). Locate: (1) each side of body on forward compartment top outboard.	1	
5390-0344-B26	FireTech FT-GESM scene lights (PR) with chrome flange (when required) and weatherproof connectors with diamond plate mounting box. Switch in cab (driver and officer side lights switched separately). Locate: (1) each side of body on rearward compartment top outboard.	1	
<b>LIGHTS - NON-WARNING</b>			
5400-0185	LED pump compartment light (EA).	1	
5400-0260	TecNiq model E10 pump panel LED light package - top mount. Includes (2) lights per side pump panel and (3) lights for top mount panel. Side pump panels over 45" wide may require additional lights. Top mount only.	1	
<b>CAMERAS / INTERCOM</b>			
5350-0546	Install camera at rear of body provided by chassis manufacturer.	1	

Salescode	Extended Description	Qty	
<b>LIGHTS - AREA</b>			
5450-0589-409	Light Whelen 12V Pioneer model PFH1P powder coated white with internal top raise pole mount. Includes switch in cab (driver and officer side facing lights switched separately). Location: driver side of pump module rearward of TM control panel.	1	
5450-0589-410	Light Whelen 12V Pioneer model PFH1P powder coated white with internal top raise pole mount. Includes switch in cab (driver and officer side facing lights switched separately). Location: officer side of pump module rearward of TM control panel.	1	
<b>MISC LOOSE EQUIPMENT</b>			
7900-0014	DOT Required Drive Away Kit - Kit includes three (3) triangular warning reflectors with carrying case. This kit is for the end user and is to remain with the truck.	1	
<b>EXTERIOR PAINT</b>			
8100-0062	Paint Sample Spray Out - Dealer is responsible for returning written approval prior to order release. Base color of cab / chassis. Qty one in BOM will supply a pair of paint samples.	1	
8100-0089	All applicable pump/pre-connect application modules are to have a sanded finish (not painted job color). Includes upper and lower pump modules, crosswalk module and/or speedlay/pre-connect module (as applicable). Rear mounted body/pump module to be painted job color.	1	
8100-0116	Rear body surface to have a sanded finish (not painted job color). Includes hinged doors that do not have discrete sales codes and removable panels.	1	
8100-0668	Paint Body - Small - For Pumpers, Rear Mounts, S/A Tankers and Rescues. Sikkens standard (non-metallic) paint. Color:	1	FLNA 31652 E-ONE Red
8100-0775	Commercial cab to be painted by OEM as specified.	1	
<b>LETTERING</b>			
8200-0113	Scotchlite Letter (Each) upto 6" tall. The exact size, color and location of the letters as specified by the customer.	24	
8200-0114	Scotchlite Letter (Each) upto 12" tall. The exact size, color and location of the letters as specified by the customer.	12	
<b>STRIPING</b>			
8300-0042	White rubrail scotchlite insert.	1	
8300-0084-000-G6	Chevron "A" style 6" printed sheet Scotchlite striping full width on rear of body. Includes rear facing extrusions, panels and doors. Colors to be Red/Lemon Yellow.	1	
8300-0093-000-G6	Chevron "A" style 6" printed sheet Scotchlite striping on front bumper. Colors to	1	

Salescode	Extended Description	Qty	
<b>STRIPING</b>			
	be Red/Lemon Yellow.		
8300-0330	Single NFPA Scotchlite Stripe - up to 6" wide and straight on cab and the body. Size, color and location as specified by the customer.	1	
8300-0334	Additional NFPA Scotchlite Stripe - up to 3" wide on cab and the body. Design, size, color and location as specified by the customer.	2	
8300-0381	Yellow perimeter marking to indicate designated standing / walking areas above 48" high in compliance with 2016 NFPA 1901 consisting of individual Reflexite diamonds approximately 1" wide. Steps, ladders and areas with a railing or structure at least 12" high are excluded from this requirement.	1	
<b>GRAPHICS</b>			
8400-0060	Graphics drawing showing striping, lettering and logos. Requires E-ONE installed graphics.	1	
<b>WARRANTY / STANDARD &amp; EXTENDED</b>			
9100-0117	General One (1) year or 24,000 Miles Limited Warranty (RFW0001)	1	
9100-0132	Electrical One (1) Year or 18,000 Miles Limited Warranty (RFW0201).	1	
9100-0136	Body Structure Aluminum Ten (10) years or 100,000 Miles Limited Warranty (RFW0502).	1	
9100-0139	Plumbing and piping (Stainless Steel) Ten (10) years or 100,000 Miles Limited Warranty (RFW0800).	1	
9100-0140	Paint and Finish (Exterior Clear coated) Ten (10) Years Limited Warranty (RFW0710).	1	
<b>SUPPORT, DELIVERY, INSPECTIONS AND MANUALS</b>			
9300-0009	Manuals, Operator and Service in digital format.	1	
9300-0316	Fire Apparatus Safety Guide published by FAMA, latest edition.	1	
<b>Dealer Supplied Equipment</b>			